



Ultrasonic sensor

UC1000-18GM90A-E2-IO-V1

- IO-link interface for service and process data
- Switch output
- Temperature compensation


Single head system



Function

This ultrasonic sensor is a contactless distance sensor based on the echo run time principle. It is suitable for the detection of solid, liquid or powder sound-reflecting objects. The IO-Link interface makes it ideally suited to applications in which the consistent communication of process, parameter and diagnostic data through to sensor level plays an important role.

Dimensions

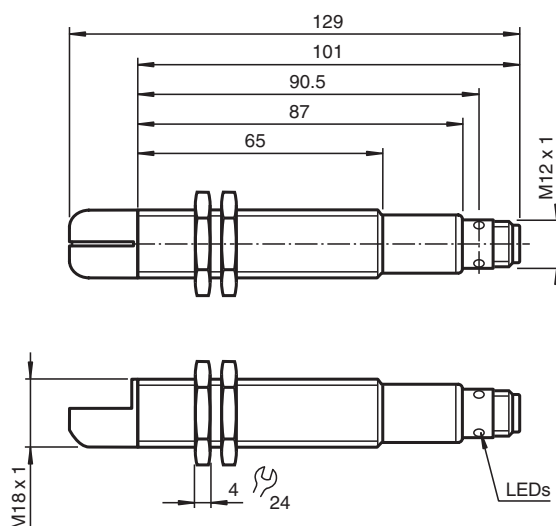

Technical Data

General specifications

Sensing range	100 ... 1000 mm
Adjustment range	110 ... 1000 mm
Dead band	0 ... 100 mm
Standard target plate	100 mm x 100 mm

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS


Technical Data

Transducer frequency		approx. 200 kHz
Response delay		approx. 100 ms
Linearity		lateral
Nominal ratings		
Linearity error		$\leq \pm 2$ mm
Temperature drift		$\leq \pm 2.5$ %
Time delay before availability	t_v	≤ 120 ms
Limit data		
Permissible cable length		max. 20 m
Indicators/operating means		
LED green		flashes: IO-Link ON
LED yellow		on: object within measuring range
Electrical specifications		
Rated operating voltage	U_e	24 V DC
Operating voltage	U_B	12 ... 30 V DC (including ripple)
Ripple		≤ 10 %
No-load supply current	I_0	≤ 50 mA
Interface		
Interface type		IO-Link
Switching output		
Output type		1 switch output PNP, NO SIO mode
Operating current	I_L	≤ 200 mA , short-circuit/overload protected
Switching frequency		5 Hz
Voltage drop		≤ 2 V
Off-state current		≤ 0.01 mA
Switch-on delay		≤ 100 ms
Compliance with standards and directives		
Standard conformity		
Standards		EN 60947-5-2:2007+A1:2012 IEC 60947-5-2:2007 + A1:2012
Approvals and certificates		
CCC approval		CCC approval / marking not required for products rated ≤ 36 V
Ambient conditions		
Ambient temperature		-25 ... 70 °C (-13 ... 158 °F)
Storage temperature		-40 ... 85 °C (-40 ... 185 °F)
Shock resistance		30 g , 11 ms period
Vibration resistance		10 ... 55 Hz , Amplitude ± 1 mm
Mechanical specifications		
Connection type		Connector M12 x 1 , 4-pin
Degree of protection		IP67
Material		
Housing		brass, nickel-plated
Transducer		epoxy resin/hollow glass sphere mixture; foam polyurethane, cover PBT
Installation position		any position
Mass		90 g
Mounting		max. tightening torque: : 60 Nm

Connection



Connection Assignment




Wire colors in accordance with EN 60947-5-2

1	BN	(brown)
2	WH	(white)
3	BU	(blue)
4	BK	(black)


Characteristic Curve

Characteristic response curve

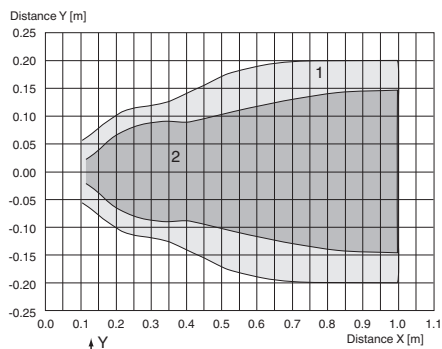

Curve 1: flat surface 100 mm x 100 mm
Curve 2: round bar, Ø 25 mm

Area definitions

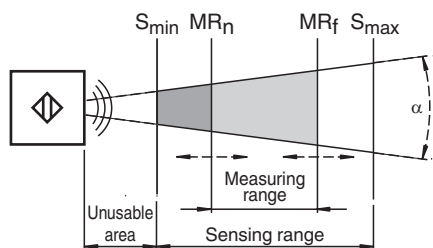

Accessories

	OMH-04	Mounting aid for round steel $\varnothing$ 12 mm or sheet 1.5 mm ... 3 mm
	BF 18	Mounting flange, 18 mm
	BF 18-F	Plastic mounting adapter, 18 mm
	BF 5-30	Universal mounting bracket for cylindrical sensors with a diameter of 5 ... 30 mm
	UVW90-K18	Ultrasonic -deflector
	V1-G-2M-PVC	Female cordset single-ended M12 straight A-coded, 4-pin, PVC cable grey
	V1-G-2M-PUR	Female cordset single-ended M12 straight A-coded, 4-pin, PUR cable grey
	V1-W-2M-PUR	Female cordset single-ended M12 angled A-coded, 4-pin, PUR cable grey

Additional Information

Description of the sensor functions

The C/Q connection of this sensor provides double function. If the sensor recognizes a connected IO-Link master and receives a communication protocol directly after power on, the sensor turns into IO-Link communication mode. If the communication protocol is missing after power on, the sensor turns into SIO mode. In this case at this pin a conventional switching signal is provided.

SIO Mode (standard switching output)

Object position	Output state
Object in unusable area	undefined
Object in sensing range but not in programmed measuring range	off
Object in programmed measuring range	on

Communication in IO-Link mode

Example parametrization for variable parameters

Process data	Object position [mm]
undefined	$0 \leq \text{object distance} < 100$
-1	$100 \leq \text{object distance} < 110$
-2	$110 \leq \text{object distance} < MR_n$
Object distance [mm]	$MR_n \leq \text{object distance} < MR_f$
-3	$MR_f \leq \text{object distance} < 1000$
-4	unknown object distance

Device ID	M18	30 02 00 hex	
Informational data (read only)	Value range	Sub-index	
Interne Temperatur:	-25 °C ... 105 °C	1	
Parameter data (read / write)	Value range	Sub-index	Default value
Start of measuring range MB_n	110 mm ... MR_f	7/8	110 mm
end of measuring range MB_f	$> MR_n$... 1000 mm	9/10	1000 mm
Filter depth for averaging	0 ... 255	2	3